

HSF







SPECIFICATION

Current Rating: 1Amp
Insulation Resistance: 1000M ohms min
Contact Resistance: 20M ohms max
Dielectric Withstanding: AC500V
Operating Temperature: -65°C to +125°C
Contact Material: Brass
Insulator Material: PA6T UL 94V-0 Black

Ordering Code:

FHCS07 - X - X - D - X - X - X - X
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No:
② No. of Contacts
02 To 100
③ Contact Plating:
G0:Gold flash S0:Selective
G1:3U" Gold S1:Selective 3u"
G2:5u" Gold S2:Selective 5u"
G3:10u" Gold S3:Selective 10u"
G4:15u" Gold S4:Selective 15u"
G5:30u" Gold S5:Selective 30u"
SN:Tin
④ Connector Type
D: Dual
⑤ Plastic High:
H:4.6
Please mark the desired length in the H
- ⑥ Insulator Material
B:PA6T
C:LCP
E:PA9T
⑦ Packing
A:Tray
B:Bag
T:Tube
U:Tube+CAP
R:Tape&Reel
W:Tape&Reel+CAP
⑧ Pin Length
A:1.6
B:2.4
C:3.0

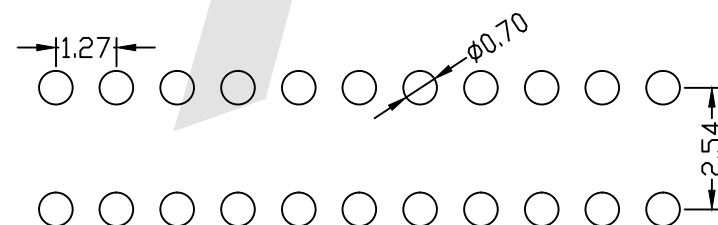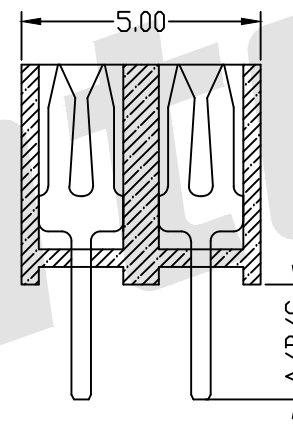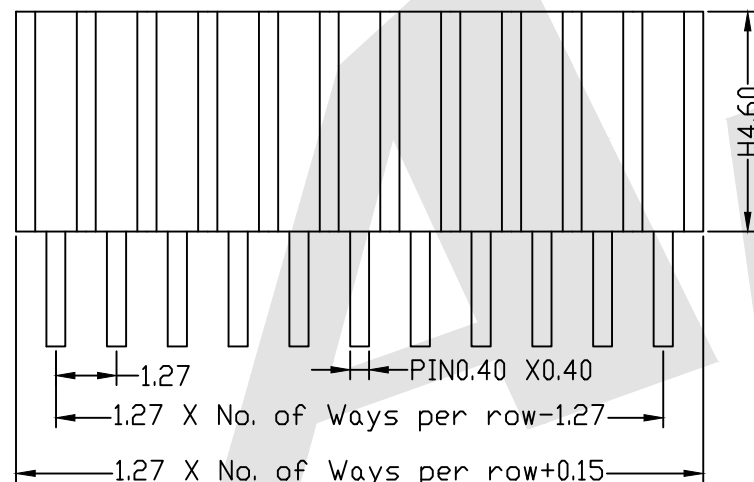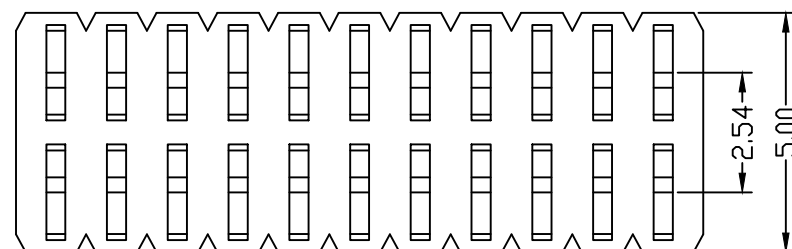

PCB LAYOUT


Unless Otherwise specified tolerance

X. XX: ±0.20
X. X: ±0.25 X. XXX: ±0.15
X. XX: ±0.35

SCALE: As Shown UNIT: mm

DRAW YG ZHONG DATE 01/05/2016

CHECK BobYang DATE 01/05/2016



3rd ANGLE PROJECTION



ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE:
1.27 X 2.54mm Female Header Dual Row Straight Type

DRAWING NO: FHCS07-XXDXXXX

PRODUCT NO: FHCS07-XXDXXXX

REV

DESCRIPTION

DATE