
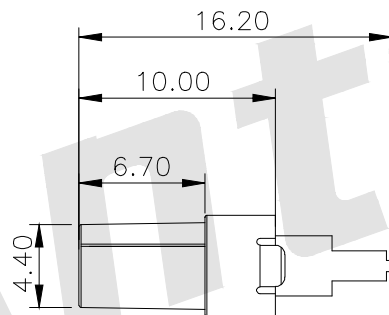
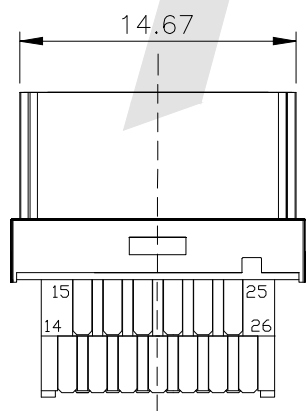
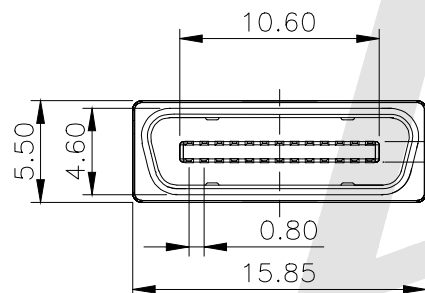


HSF

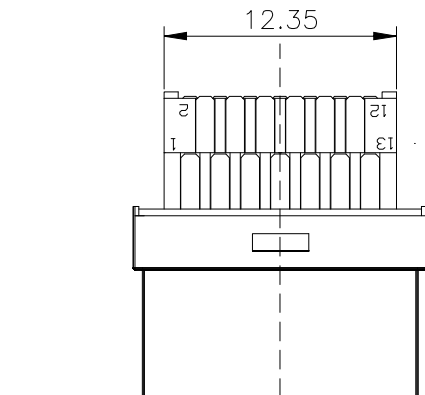

MATERIAL:

- 1. Insulator:LCP BLACK (UL94V-0)
- 2. Cover:LCP BLACK (UL94V-0)
- 3. Contact:COPPER ALLOY(T=0.30)
- 4. Shell:ZINC ALLOY

SPECIFICATION:

- 1. Curren Rating: 0.5 AMPS
- 2. Insulation Resistance:500MΩ Min. AT 500VDC
- 3. Dielectric Strength:500V For 60 Second
- 4. Operation Temperature -55° - +70° C
- 5. Contact Rating:30VAC

PLATING:

- Terminal:50u"MIN Nickel All Over
- 80u"MIN Ton on Sloder Area
- 5u"Gold ON Contact Area
- SHELL:100u"MIN Nickel Over 50u"Min Copper

Ordering Code:

SDR - M - V26 - X  
 ① ② ③ ④


- ① Series No:
- ② Contact Type:  
M:Male
- ③ Contact NO. :  
V26=26P
- ④ Contact Plating:  
G0: Gold Flash Selective Plating  
G1: 5u" Gold Selective Plating  
G2: 15u" Gold Selective Plating  
G3: 30u" Gold Selective Plating

Unless Otherwise specified tolerance  
 X. ±0.35 X.XX: ±0.20  
 X.X: ±0.25 X.XXX: ±0.15

**Antenk**® ANTENK ELECTRONICS CO., LTD  
 Http://www.antenk.com  
 E-mail:sales@antenk.com

SCALE: As Shown UNIT: mm  
 DRAW Wu Feng Rong DATE 08/06/2020  
 CHECK Bob Yang DATE 08/06/2020

TITLE: 0.8mm Series Shielded 26P Cable Plug Connector  
 Solder Molded Ribbon Type



DRAWING NO: SDR-M-V26-X

PRODUCT NO: SDR-M-V26-X

Update Drawing

07/27/2021

REV

DESCRIPTION

DATE